



Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



DATA SHEET

Premium Efficiency Motor: **WPEVHS25-18-284TP-16.5,**

60 Hz

Document Generated: 11-May-2022
Document ID:

Customer:

MOTOR INFORMATION

HP	25
RPM	1800
Phase	3
Frequency	60 Hz
Voltage	230/460
Frame Size	284TP
Enclosure	ODP - WPI
Degree of Protection	IP23
Service Factor	1.15
Poles	4
Full Load Speed	1785
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	0.96%
NEMA Design	B
Moment of Inertia	5.99 lb.ft.^2
Locked Rotor Time (Hot)	79 seconds
Sound Pressure Level	88 dB(A)
Number of Starts	3 Cold / 2 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	V1
Rotation	CCW - with Anti-Reverese Ratchet
Area of Classification	Safe
Inverter Rating	10:1 VT
Standard	NEMA MG-1
Approvals	CSA

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	93.6 %	0.86
75%	93.2 %	0.82
50%	91.9 %	0.72

TORQUE

FULL LOAD	LRT	BDT
73 lb.ft.	204 %	246 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	57.6A	28.8A
Locked Rotor Amps	354.2A	177.1
No Load Current	A	
	20.8A	10.4A

BEARING INFORMATION

Lower (DE) Bearing	7312B
Upper (ODE) Bearing	6212-C3
DE Lubrication Type	Mobil Polyrex EM
ODE Lubrication Type	Mobil Polyrex EM
DE Regreasing Interval	3800 Hours
ODE Regreasing Interval	3800 Hours
Lubrication Quantity	30g / 60g

ADDITIONAL DATA

Down Thrust	3200 lbs
Shaft Material	45 Carbon Steel
Connection Diagram	12 Lead 2Δ/Δ
Approximate Weight	571 lbs.

Vertical Hollow Shaft Motor Drawing




Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



284TP - 16.5 BD

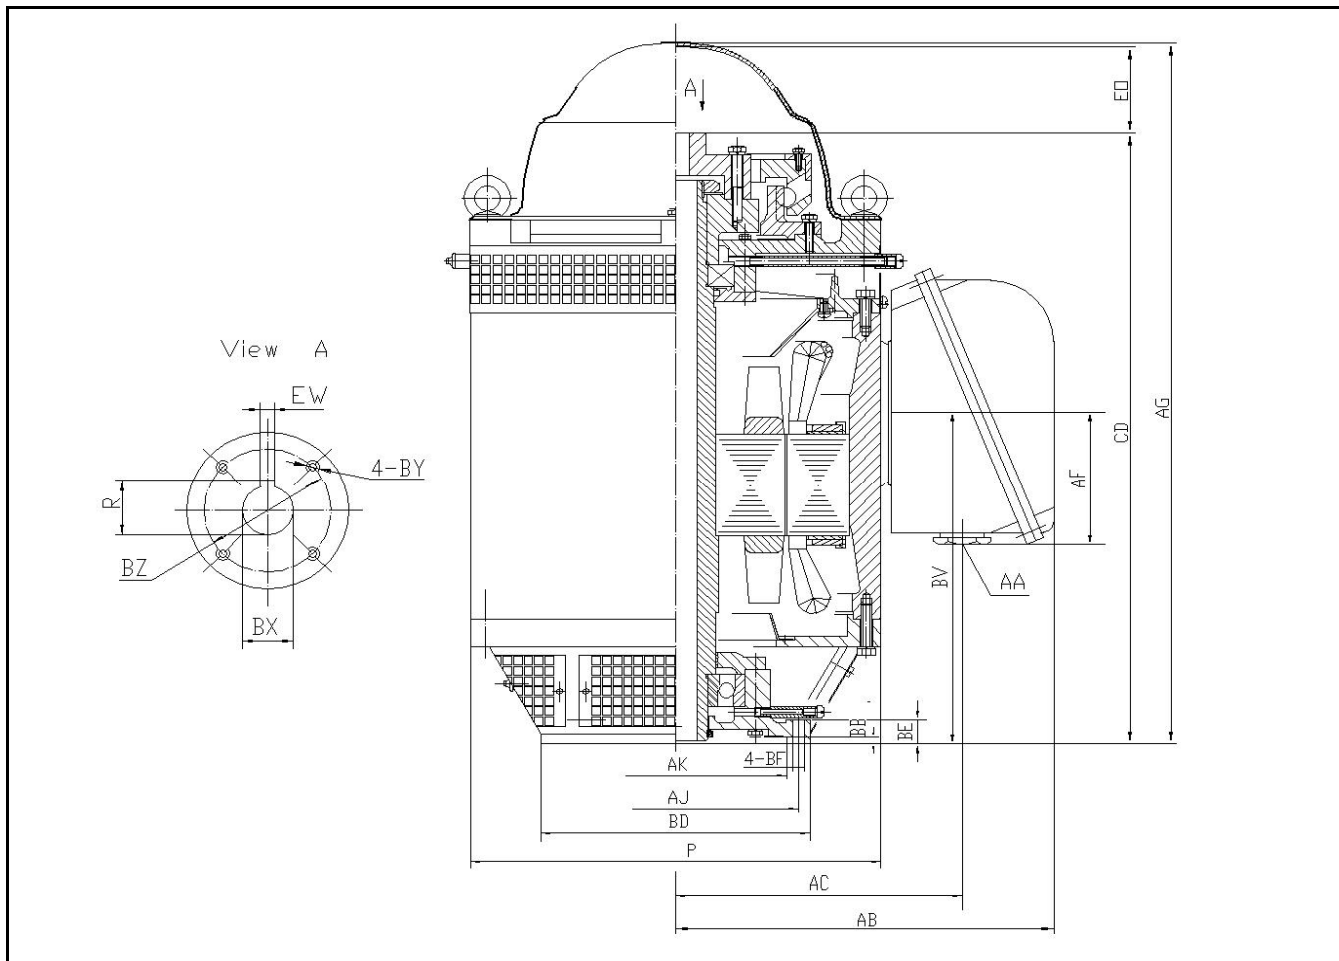

DIMENSIONS - INCHES

COUPLING - STANDARD BORE				
BX	EW	R	BY	BZ
1	1/4	1.13	10-32	1-3/8

OVERALL			
P	AB	AG	BV
15.24	14.39	28.2	12.6

1

BASE						
AJ	AK	BB	BD	BF	EO	BE
14.75	13.5	0.25	16.5	4 * 0.69	3.22	0.79
CD	AC	AF	AA			
24.75	10.6	5.83	3 NPT			

Revised - 5/11/2022



PERFORMANCE CURVES

Premium Efficiency Motor:

WPEVHS25-18-284TP-16.5


Document Generated: 25-Jan-2023

Document ID:


Customer:

Motor Type	WPEVHS				
Output Rating (HP)	25		FL Speed	1785	
Full Load Torque	73	lb.ft	LRT (%FLT)	204	460 volt FLA 28.8A
Rotor Wk^2	93.6	lb-ft^2	BDT (%FLT)	246	230 volt FLA 57.6A

SPEED VS TORQUE & CURRENT CURVE

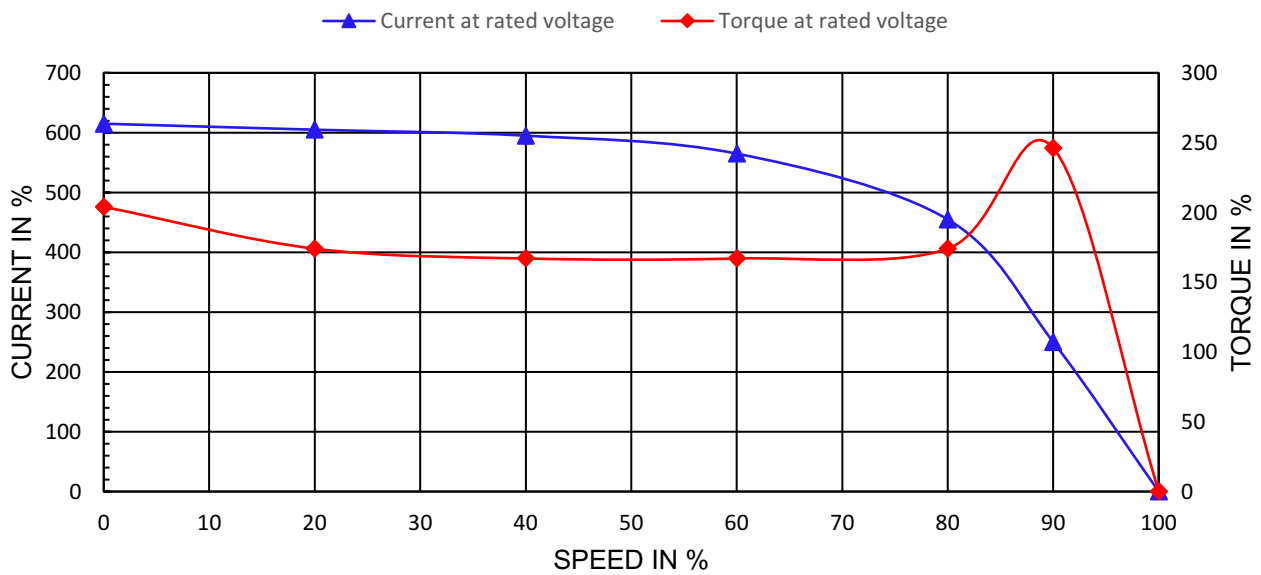

OUTPUT VS EFF., P.F. & CURRENT CURVE

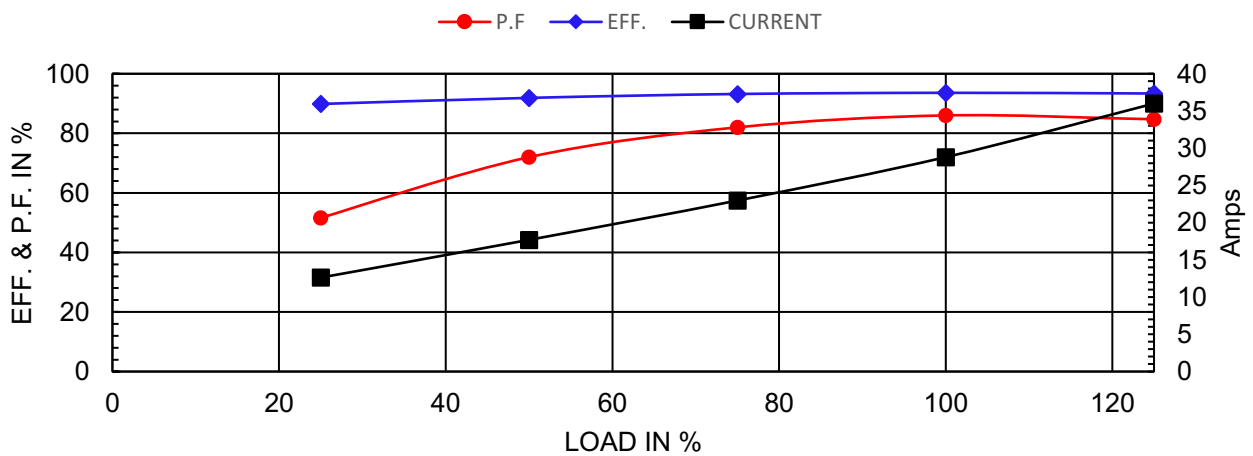



Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



NAMEPLATE / WIRING

Premium Efficiency Motor: **WPEVHS25-18-284TP-16.5**

Document Generated: 11-May-2022
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		PREMIUM EFFICIENCY THREE PHASE VHS MOTOR				CC326B
Model:						
Frame:	Ins Cl: F	Hz:	60	50	230V T4 T9 T6 T8 T5 T7 T10 T11 T12 T2 T3 T1 460V T4 T5 T6 T7 T8 T9 T10 T11 T12 T2 T3 T1 MADE IN CHINA	
HP:	AMB. 40 C	Volt:	230/460	200/400		
Duty: CONT	Lbs.	Amps:				
Nominal Eff:		RPM:				
Encl: WPI DP		SF:				
DE/ODE Brng:		SFA:	A	A		
S/N		LRA:	A	A		
Down thrust rating:					lbs.	
Inverter Rated 10:1 VT						
ROTATION						
WORLDWIDE ELECTRIC CORPORATION						

Model	WPEVHS25-18-284TP-			60 Hz	50 Hz
16.5 Frame	284TP			Amps	
HP	25			57.6/28.8A	66/33A
Nom.Eff.	93.6%			RPM	
				1785	1485
DE/ODE Brng	7312B 6212-			SF	
				1.15	1.15
C3 SFA Down Thrust	3200 lbs			66/33A	75/37.5A
				LRA	
				354.2/177.1A	491/245A